




■ Solid timber on support battens

Direct Installation


□ System IDEAL ECO



- 1 Solid timber boards ≥22mm
 - 2 System element ECO + pipe 30mm
 - 3 Perimeter support batten
 - 4 IDEAL ECO perimeter insulation
 - 5 Pavaboard, Rockfloor or similar variable
 - 6 Moisture barrier (if required)
- Construction height variable

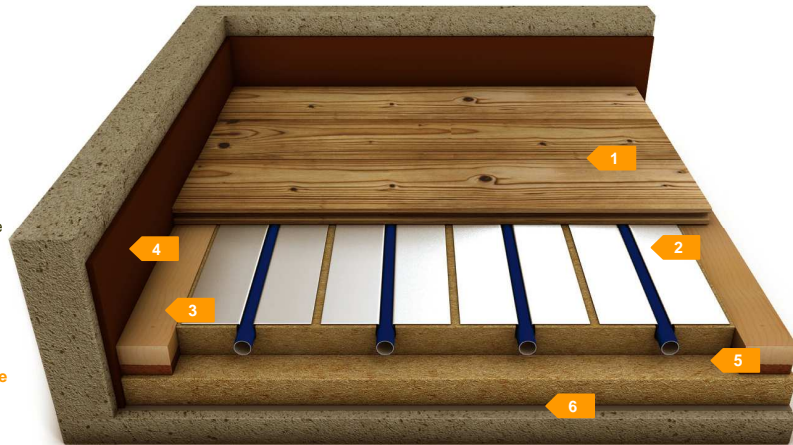

Technical Data Construction suitable for ground floor constructions

Construction height	mm	variable	Height dependant on primary insulation	
Weight	kg/m²	26	Weight with floor finish	
Thermal resistance R	m²K/W	variable		
Heat exchange coefficient	W/m²K	variable		
Live design load	kN/m²	≤2,0		
Point load (≥ 20cm²)	kN	≤2,0		
Impact sound reduction	dB	≥ 22	Valid on concrete floors >12cm (DIN EN 4109: m² > 276kg/m²)	
Area of application Ground floors or floors located above unheated rooms such as garages 	This construction is suitable for ground floor constructions. Overall construction height and number of layers is critical in dry installed ground floor constructions. For further assistance please contact us.			
Specific installation requirements	Substrate must be solid, level and flat so that the heating elements can lie flat. Tolerance required as per DIN 18202 table 3, group 4. It is recommended that although the timber boards may be secret nailed to the battens, the battens should not fixed down. Please check with your provider of insulation to check compressive strength and insulation value to height ratio. High compressive strength is a prerequisite within dry installed constructions.			